

LED DOWNLight

Features

- 15W LED Downlight
- Recessed round, uniform distribution
- Ideal replacement up to 100W halogen downlight
- Adjustable tilting angle of $\pm 20^\circ$ vertically (ND144, ND145)
- Beam angle: 36°
- Color Rendering Index: ≥ 80
- Dimmable as option

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium
- Reflector: High purity, anodized aluminium





Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out diameter $\varnothing 90\text{mm}$

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

Dimming Options

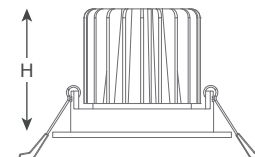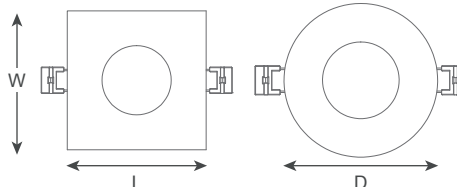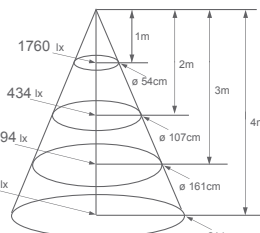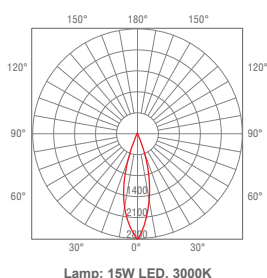

(Unit : mm)	(L)	(W)	(H)	(Unit : mm)	(D)	(H)
ND143	100	x 100	x 75	ND141	Ø100	x 65
ND145	100	x 100	x 75	ND142	Ø100	x 75
				ND144	Ø100	x 75



Model	Luminaire Wattage	Luminaire Lumen	LED Wattage	LED Lumen	Color Temp	Driver
ND141E-15W/830	15W	950lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND141E-15W/840	15W	1000lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND141E-15W/865	15W	1050lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND142E-15W/830	15W	1000lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND142E-15W/840	15W	1050lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND142E-15W/865	15W	1100lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND143E-15W/830	15W	1000lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND143E-15W/840	15W	1050lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND143E-15W/865	15W	1100lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND144E-15W/830	15W	1100lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND144E-15W/840	15W	1150lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND144E-15W/865	15W	1200lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND145E-15W/830	15W	1100lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND145E-15W/840	15W	1150lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND145E-15W/865	15W	1200lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA

Notice : We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.