

LED DOWNLight

Features

- 15W LED Downlight
- Recessed round, uniform distribution
- Ideal replacement up to 100W halogen downlight
- Adjustable tilting angle of 0°-20° vertically
- Beam angle: 36°
- Color Rendering Index: ≥80
- Dimmable as option

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium
- Reflector: High purity, anodized aluminium




Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out diameter Ø75mm


Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

Dimming Options

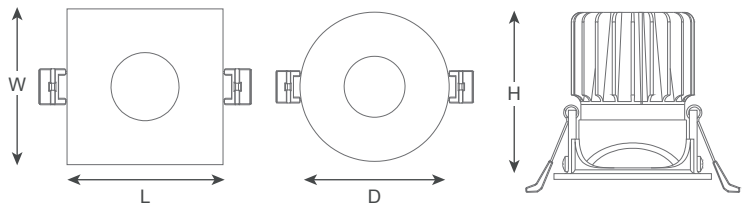

(Unit : mm)	(L)	(W)	(H)	(Unit : mm)	(D)	(H)
ND152	82	x	82	x	80	
ND155	82	x	82	x	80	
ND151				Ø88	x	80
ND154				Ø88	x	80



Model	Luminaire Wattage	Luminaire Lumen	LED Wattage	LED Lumen	Color Temp	Driver
ND151E-15W/830	15W	640lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND151E-15W/840	15W	670lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND151E-15W/865	15W	700lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND152E-15W/830	15W	640lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND152E-15W/840	15W	670lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND152E-15W/865	15W	700lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND154E-15W/830	15W	690lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND154E-15W/840	15W	720lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND154E-15W/865	15W	750lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA
ND155E-15W/830	15W	690lm	13W	1485lm	3000K	DC 36±2V C.C. 350mA
ND155E-15W/840	15W	720lm	13W	1535lm	4000K	DC 36±2V C.C. 350mA
ND155E-15W/865	15W	750lm	13W	1585lm	6500K	DC 36±2V C.C. 350mA

Notice: We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.