



## LED Downlight ND204S - ND207S

### Features

- 9W / 11W / 15W / 20W / 22W LED Downlight
- Selectable wattage via dip-switch
- Inventory cost saving
- Recessed round, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Good color rendition, Ra ≥80

### Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PC, UV protected

### Installation / Mounting

- Metal box with Ø20mm knockout facilitates conduit mounting
- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions Ø110mm / Ø140mm / Ø190mm



### Standards

- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IP 20




- Selectable Watt
- Inventory cost saving

### Dip-switch

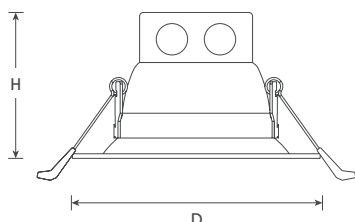

(Unit : mm)	(D)	(H)	Cut Out Dimensions
<b>ND204S</b>	Ø140	x 83	Ø110
<b>ND205S</b>	Ø180	x 85	Ø140
<b>ND207S</b>	Ø220	x 85	Ø190

Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
ND204S-9W/830	220 - 240V	5W - 7W - 9W	3000K	90°	410lm - 575lm - 740lm	F
ND204S-9W/840	220 - 240V	5W - 7W - 9W	4000K	90°	410lm - 575lm - 740lm	F
ND204S-9W/865	220 - 240V	5W - 7W - 9W	6500K	90°	410lm - 575lm - 740lm	F
ND204S-11W/830	220 - 240V	5W - 8W - 11W	3000K	90°	410lm - 640lm - 875lm	F
ND204S-11W/840	220 - 240V	5W - 8W - 11W	4000K	90°	410lm - 640lm - 875lm	F
ND204S-11W/865	220 - 240V	5W - 8W - 11W	6500K	90°	410lm - 640lm - 875lm	F
ND205S-15W/830	220 - 240V	9W - 12W - 15W	3000K	90°	740lm - 935lm - 1165lm	F
ND205S-15W/840	220 - 240V	9W - 12W - 15W	4000K	90°	740lm - 935lm - 1165lm	F
ND205S-15W/865	220 - 240V	9W - 12W - 15W	6500K	90°	740lm - 935lm - 1165lm	F
ND205S-20W/830	220 - 240V	10W - 15W - 20W	3000K	90°	800lm - 1165lm - 1510lm	F
ND205S-20W/840	220 - 240V	10W - 15W - 20W	4000K	90°	800lm - 1165lm - 1510lm	F
ND205S-20W/865	220 - 240V	10W - 15W - 20W	6500K	90°	800lm - 1165lm - 1510lm	F
ND207S-22W/830	220 - 240V	10W - 15W - 22W	3000K	90°	800lm - 1165lm - 1680lm	F
ND207S-22W/840	220 - 240V	10W - 15W - 22W	4000K	90°	800lm - 1165lm - 1680lm	F
ND207S-22W/865	220 - 240V	10W - 15W - 22W	6500K	90°	800lm - 1165lm - 1680lm	F



EUROPE



INDOOR LUMINAIRE