

# LED Ceiling Light NC161E - NC164E



## Features

- 6W / 12W / 18W / 24W LED Ceiling Light
- Uniform distribution with opal diffuser
- Comfort glare-free light
- Good color rendition, Ra ≥80

## Materials / Finish



- Body: Sheet steel with white finish
- Diffuser: Opaque acrylic

## Installation / Mounting



- Suitable for surface mounting
- Integral gear unit allows quick and easy installation

## Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 20

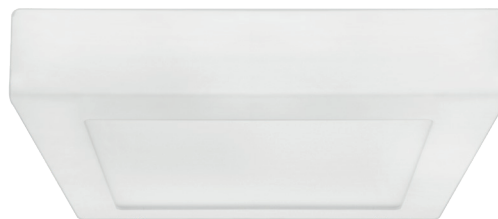

Lamp: LED 12W 6500K



(Unit : mm)	(L)	(W)	(H)
<b>NC161E</b>	120 x	120 x	32
<b>NC162E</b>	170 x	170 x	32
<b>NC163E</b>	220 x	220 x	32
<b>NC164E</b>	300 x	300 x	32



Model	Voltage	Luminaire Wattage	Luminaire Lumen	Color Temp	Beam Angle	Light Source Wattage	Light Source Lumen	ENERGY STAR
NC161E-6W/830	220 - 240V	6W	410lm	3000K	120°	5.4W	470lm	G
NC161E-6W/840	220 - 240V	6W	430lm	4000K	120°	5.4W	480lm	G
NC161E-6W/865	220 - 240V	6W	450lm	6500K	120°	5.4W	480lm	G
NC162E-12W/830	220 - 240V	12W	900lm	3000K	120°	10.8W	1120lm	F
NC162E-12W/840	220 - 240V	12W	950lm	4000K	120°	10.8W	1200lm	F
NC162E-12W/865	220 - 240V	12W	1000lm	6500K	120°	10.8W	1200lm	F
NC163E-18W/830	220 - 240V	18W	1450lm	3000K	120°	16.2W	1765lm	F
NC163E-18W/840	220 - 240V	18W	1550lm	4000K	120°	16.2W	1800lm	F
NC163E-18W/865	220 - 240V	18W	1650lm	6500K	120°	16.2W	1800lm	F
NC164E-24W/830	220 - 240V	24W	2100lm	3000K	120°	21.6W	2415lm	F
NC164E-24W/840	220 - 240V	24W	2200lm	4000K	120°	21.6W	2520lm	F
NC164E-24W/865	220 - 240V	24W	2300lm	6500K	120°	21.6W	2520lm	F

\*Energy efficiency class based on light source lumen

