

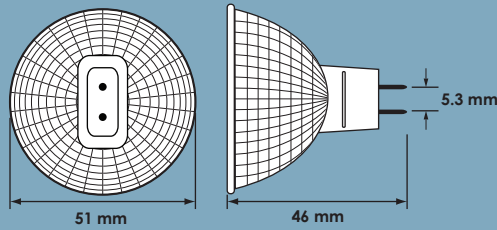


MR16 51mm diameter Halogen Reflector Lamps




- Halogen reflector lamp for display lighting
- Colour temperature 3000K for dichroic reflector and 2900K for aluminium coated reflector
- Xenon halogen technology applied to Super 5K and Ultra 10K version, glass cover only
- Reflector :




- Average life :


Standard MR16 :



Super 5K MR16 :




Ultra 10K MR16 :



Other options :

- Other wattages available, e.g. 10W, 42W and 65W
- Other voltages available, e.g. 6V, 14V, 24V and 28V
- Different reflector patterns available
- Other base types available, e.g. E11, Ba15d
- High efficiency output (over 20lm/W) for photo-optics emergency lighting applications



ANSI/UK Code	GC/UK Code	Voltage (V)	Wattage (W)	Beam Angle	Intensity (cd)			Base
					Standard	Super5K	Ultra10K	
ESX M68	M268	12	20	12°	4100	5000	4100	GU5.3
BBF M94	M294	12	20	24°	1500	2000	1500	GU5.3
BAB M69	M269	12	20	36°	700	900	700	GU5.3
FMT ---	---	12	35	12°	7000	9000	7000	GU5.3
FRA M70	M270	12	35	23°	3500	4400	3500	GU5.3
FMW M81	M281	12	35	36°	1250	1600	1250	GU5.3
EXT M49	M249	12	50	13°	10000	13000	10000	GU5.3
EXZ M50	M250	12	50	24°	4400	5600	4400	GU5.3
EXN M58	M258	12	50	38°	1700	2200	1700	GU5.3
FNV M80	M280	12	50	60°	1000	1300	1000	GU5.3
EYF M60	M260	12	75	14°	15000	-	15000	GU5.3
EYC M61	M261	12	75	38°	2950	-	2950	GU5.3