



# Double Ended J-Type Linear Halogen Lamps

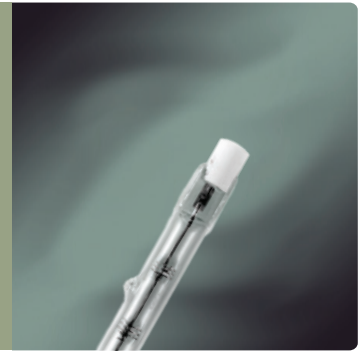

- In-line protection fuses are recommended for 220-240V circuits according to EN60357 (BS1075) for following wattages :
 

60W to 300W	- 2A
500W	- 4A
750W & 1000W	- 6.3A
1500W & 2000W	- 10A
- Average life 2000 hours
- Colour temperature 2900K
- Protective covers are required for lighting fixtures



Lamp Code	Voltage (V)	Wattage (W)	Lumen (lm)	Base	Filament Support	Diameter D (mm)	Length L <sub>1</sub> (mm)	Length L <sub>2</sub> (mm)
J-78/60W	120/130/230/240	60	840	R7s	Re-inforced	8	80	76±1.5
J-78/75W	120/130/230/240	75	1050	R7s	Re-inforced	8	80	76±1.5
J-78/100W	120/130/230/240	100	1650	R7s	Re-inforced	8	80	76±1.5
J-78/150W	120/130/230/240	150	2600	R7s	Re-inforced	8	80	76±1.5
J-78/200W	120/130/230/240	200	3200	R7s	Re-inforced	8	80	76±1.5
J-78/250W	120/130/230/240	250	4000	R7s	Re-inforced	8	80	76±1.5
J-118/100W	120/130/230/240	100	1650	R7s	Re-inforced	8	118	114±1.5
J-118/150W	120/130/230/240	150	2600	R7s	Re-inforced	8	118	114±1.5
J-118/200W	120/130/230/240	200	3200	R7s	Standard	8	118	114±1.5
J-118/300W	120/130/230/240	300	5000	R7s	Standard	8	118	114±1.5
J-118/500W	120/130/230/240	500	9500	R7s	Standard	10	118	114±1.5
J-189/750W	230/240	750	16500	R7s	Standard	10	189	185±1.5
J-189/1000W	230/240	1000	22000	R7s	Standard	10	189	185±1.5
J-254/1000W	230/240	1000	22000	R7s	Standard	10	254	251±1.5
J-254/1500W	230/240	1500	33000	R7s	Standard	10	254	251±1.5
J-333/2000W	230/240	2000	44000	R7s	Standard	10	333	329±1.5
J-333/2000W	230/240	2000	44000	FA4	Standard	10	334	329±1.5