


JCD-Standard 2-Pin Line Voltage Halogen Lamps



- No transformer is required
- Available with clear or frosted bulbs
- Average life 2000 hours
- Colour temperature 3000K
- Other wattages available, e.g. 25W, 200W, 250W
- UV-STOP quartz capsule available on request

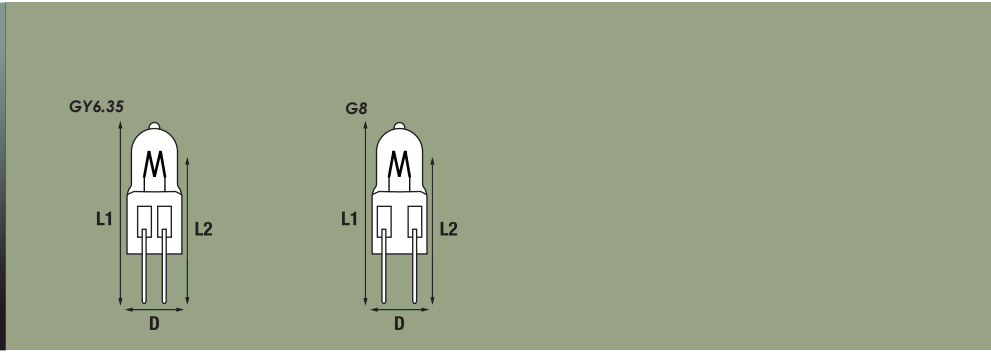


WARNING :

To avoid electrical hazards, appropriate warning should be displayed on fixture to alert user of high-volt JCD lamp replacement instead of low-volt JC lamp

Lamp Code	Voltage (V)	Wattage (W)	Lumen (lm)	Base	Diameter D (mm)	Length L ₁ (mm)	Length L ₂ (mm)
JCD 20W	120/130/230/240	20	200	G8, GY6.35	12	46	36
JCD 35W	120/130/230/240	35	380	G8, GY6.35	12	46	36
JCD 50W	120/130/230/240	50	600	G8, GY6.35	12	46	36
JCD 60W	120/130/230/240	60	800	G8, GY6.35	12	46	36
JCD 75W	120/130/230/240	75	1050	G8, GY6.35	12	49	39
JCD 100W	120/130/230/240	100	1500	G8, GY6.35	15	60	45
JCD 150W	120/130/230/240	150	2500	G8, GY6.35	15	60	45

JCD-Super 5K 2-Pin Line Voltage Halogen Lamps

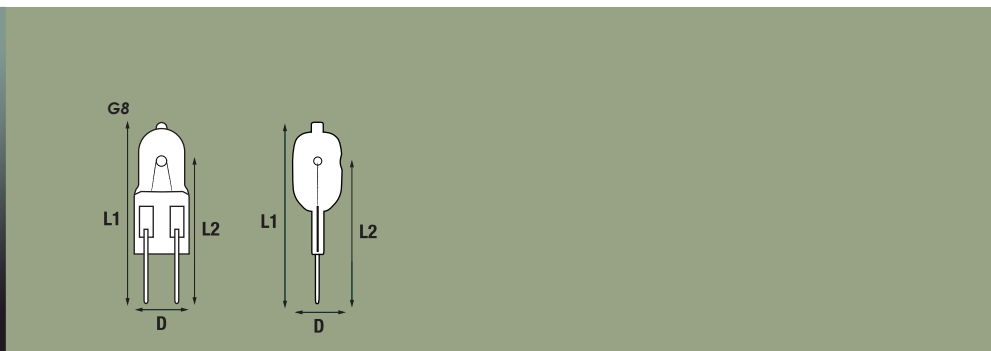

- Average life 5000 hours
- Colour temperature 3000K



Lamp Code	Voltage (V)	Wattage (W)	Lumen (lm)	Base	Diameter D (mm)	Length L ₁ (mm)	Length L ₂ (mm)
JCD/5K 20W	120/130	20	180	G8, GY6.35	12	46	36
JCD/5K 35W	120/130	35	340	G8, GY6.35	12	46	36