
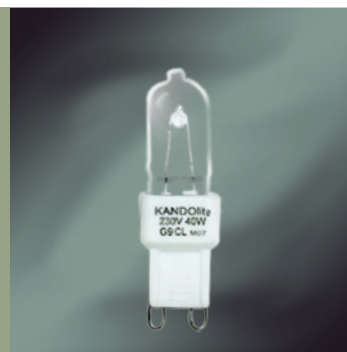


## Ceramic G9 Line Voltage Halogen Lamps



Lamp Code	Voltage (V)	Wattage (W)	Lumen (lm)	Base	Bulb Dia. D (mm)	MOL L (mm)
G9 25W	120 – 130 / 220 – 250	25	255	G9	13	56
G9 35W	120 – 130 / 220 – 250	35	380	G9	13	56
G9 40W	120 – 130 / 220 – 250	40	480	G9	13	56
G9 50W	120 – 130 / 220 – 250	50	600	G9	13	56
G9 60W	120 – 130 / 220 – 250	60	800	G9	13	58
G9 75W	120 – 130 / 220 – 250	75	1050	G9	13	58

### Ceramic G9 and Glass pinch G9 :

- ➔ Freely suspended filament, minimize deformation
- ➔ Built-in safety fuse action, no lamp explosion hazard
- ➔ Extended lamp life of 2000 hours
- ➔ Available in clear and frosted finish
- ➔ Conforms to EN60432-2/EN60357 requirements with double protection fuses
- ➔ Self-shielded feature allows free burning in open fixtures – conforms to EN60598 safety requirements
- ➔ UV-STOP Quartz capsule





#### Patent Alert :

Ceramic G9 connection with protective rights embodied under :

Germany Utility Model Patent No. 20209078.7

China Utility Model Patent No. 02238768.4

## Glass pinch G9 Line Voltage Halogen Lamps

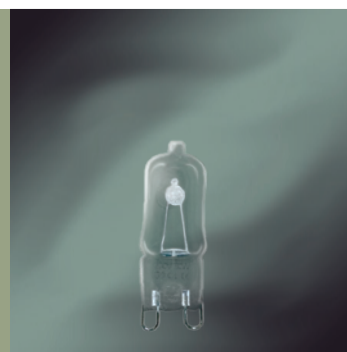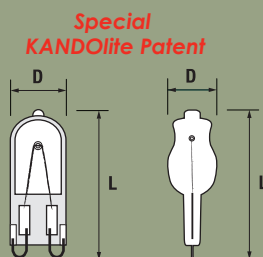

Lamp Code	Voltage (V)	Wattage (W)	Lumen (lm)	Base	Bulb Dia. D (mm)	MOL L (mm)
G9-GP 25W	120 – 130 / 220 – 250	25	255	G9	13	42
G9-GP 35W	120 – 130 / 220 – 250	35	380	G9	13	42
G9-GP 40W	120 – 130 / 220 – 250	40	480	G9	13	42
G9-GP 50W	120 – 130 / 220 – 250	50	600	G9	13	42
G9-GP 60W	120 – 130 / 220 – 250	60	800	G9	13	42
G9-GP 75W	120 – 130 / 220 – 250	75	1050	G9	13	42

**KANDOLite®**  
Brings you Light and Prosperity