


JDR GU10/GZ10 Base - Line Voltage Reflector Lamps




- Average life 2000 hours
- Colour temperature 3000K
- Comforms to EN60432-2/EN60357 requirements with double protection fuses.
- Self-shielded feature allows free burning in open fixtures – conforms to EN60598 safety requirements
- The hard glass front cover serves to block out harmful UV radiation

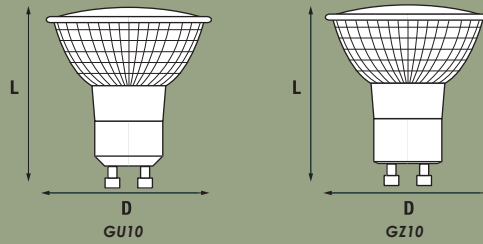

Other options :

- Beam angle : Wide flood 50° with frosted lamp capsule
Super wide flood 70° with frosted glass cover



Lamp Code	Voltage (V)	Wattage (W)	Beam Angle	Intensity (cd)	Coating Type	Base	Diameter D (mm)	Length L (mm)
50mm diameter reflector								
JDR-R50	120 -130 / 230 - 240	20	30°	130	aluminium	GU10	50	53
JDR-R50	120 -130 / 230 - 240	25	30°	450	aluminium	GU10	50	53
JDR-R50	120 -130 / 230 - 240	35	30°	700	aluminium	GU10	50	53
JDR-R50	120 -130 / 230 - 240	35	30°	650	dichroic	GZ10	50	53
JDR-R50	120 -130 / 230 - 240	50	30°	1100	aluminium	GU10	50	53
JDR-R50	120 -130 / 230 - 240	50	30°	1050	dichroic	GZ10	50	53
JDR-R50	120 -130 / 230 - 240	50	50°	550	aluminium	GU10	50	53
JDR-R50	120 -130 / 230 - 240	50	50°	500	dichroic	GZ10	50	53
63mm diameter reflector								
JDR-R63	120 -130 / 230 - 240	75	30°	2400	aluminium	GU10	63	66
JDR-R63	120 -130 / 230 - 240	75	30°	2300	dichroic	GZ10	63	66
JDR-R63	120 -130 / 230 - 240	75	50°	1000	aluminium	GU10	63	66
JDR-R63	120 -130 / 230 - 240	75	50°	950	dichroic	GZ10	63	66