



Compact Fluorescent Lamps FLAT Lamps for External Starters, Conventional and Electronic Control Gear

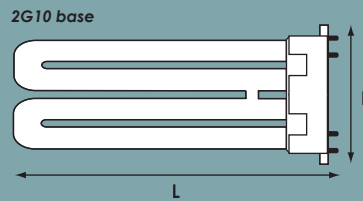

- ➔ Flat compact fluorescent lamps with high luminous efficacy
- ➔ Eight times the life and only 20% of power consumption of ordinary light bulbs
- ➔ Use with easily available conventional or electronic control gear common for T8 and FLL(2G11 base) lamps
- ➔ Two 18W lamps can be used in tandem with one 36W conventional ballast on 220-240V circuitry, savings on circuitry wiring costs
- ➔ Ideal for compact luminaries, especially for square modular, surface-mounted or recessed luminaries, low profile wall and ceiling luminaries, downlights and uplights.
- ➔ Excellent colour rendition
- ➔ Colour available :

827	=	2700K
830	=	3000K
840	=	4200K
865	=	6500K

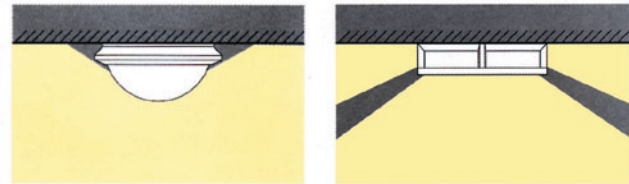

Lamp Code	Wattage (W)	CRI (Ra)	Lumen (lm)	Base	Length L (mm)
FLF-18W/827	18	80-89, 1B	1100	2G10	122
FLF-18W/830	18	80-89, 1B	1100	2G10	122
FLF-18W/840	18	80-89, 1B	1100	2G10	122
FLF-18W/865	18	80-89, 1B	1100	2G10	122
FLF-24W/827	24	80-89, 1B	1700	2G10	165
FLF-24W/830	24	80-89, 1B	1700	2G10	165
FLF-24W/840	24	80-89, 1B	1700	2G10	165
FLF-24W/865	24	80-89, 1B	1700	2G10	165
FLF-36W/827	36	80-89, 1B	2800	2G10	217
FLF-36W/830	36	80-89, 1B	2800	2G10	217
FLF-36W/840	36	80-89, 1B	2800	2G10	217
FLF-36W/865	36	80-89, 1B	2800	2G10	217