

LED Downlight ND204X - ND207X

Features

- 9W / 13W / 15W / 21W / 24W LED Downlight
- Recessed round, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Wattage and lumen can be adjusted by a driver with lower output current
- Suitable for LED emergency lighting
- Feasible to integrate with dimming and control system
- Good color rendition, Ra ≥80

Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PC, UV protected


Installation / Mounting

- Metal box with Ø20mm knockout facilitates conduit mounting
- Quick installation with mounting bracket
- Suitable for recessed mounting
- Remote gear unit allows flexible and easy installation
- Cut out dimensions Ø110mm / Ø140mm / Ø190mm

Standards

- Designed and manufactured to comply with international standard EN60598
- Class III Electrical
- IP 20

Dimming Options

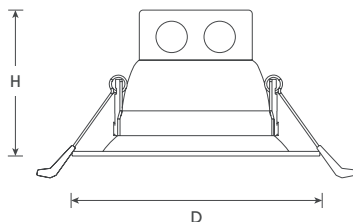

(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND204X	Ø140 x	83	Ø110
ND205X	Ø180 x	85	Ø140
ND207X	Ø220 x	85	Ø190



- EM lighting
- Dimming and control system integration

EUROPE



INDOOR LUMINAIRE

Model	Light Source Wattage	Current	Voltage	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
ND204X-9W/830	9W	C.C. 350mA	22 - 29V	3000K	90°	700lm	G
ND204X-9W/840	9W	C.C. 350mA	22 - 29V	4000K	90°	700lm	G
ND204X-9W/865	9W	C.C. 350mA	22 - 29V	6500K	90°	700lm	G
ND204X-13W/830	13W	C.C. 350mA	33 - 40V	3000K	90°	1010lm	G
ND204X-13W/840	13W	C.C. 350mA	33 - 40V	4000K	90°	1010lm	G
ND204X-13W/865	13W	C.C. 350mA	33 - 40V	6500K	90°	1010lm	G
ND205X-15W/830	15W	C.C. 350mA	39 - 47V	3000K	90°	1180lm	F
ND205X-15W/840	15W	C.C. 350mA	39 - 47V	4000K	90°	1180lm	F
ND205X-15W/865	15W	C.C. 350mA	39 - 47V	6500K	90°	1180lm	F
ND205X-21W/830	21W	C.C. 500mA	40 - 46V	3000K	90°	1710lm	F
ND205X-21W/840	21W	C.C. 500mA	40 - 46V	4000K	90°	1710lm	F
ND205X-21W/865	21W	C.C. 500mA	40 - 46V	6500K	90°	1710lm	F
ND207X-24W/830	24W	C.C. 700mA	32 - 38V	3000K	90°	1980lm	F
ND207X-24W/840	24W	C.C. 700mA	32 - 38V	4000K	90°	1980lm	F
ND207X-24W/865	24W	C.C. 700mA	32 - 38V	6500K	90°	1980lm	F

