

LED LOWBay

Features

- 25W LED Highbay - Hybrid Lamp
- Universal AC 90-305V, PF > 0.9, THD < 20%
- 6kV surge protection
- 50° cutoff eliminates glare
- Dual functions:
 - direct retrofit existing magnetic ballast without removing ignitor and capacitor
 - ballast bypass direct AC connection
- Save inventory and installation costs
- Smart electronics provide over temperature protection
- "Batwing" shape creates even light distribution with low glare
- External reflector not required
- Fan-less design eliminates the weakest link and no fan noise
- Occupancy and daylight sensor options only operating under AC line voltage with IR remote control
- Optional upgrade to Bluetooth control (North America only)
- Replace 175-400W HID Lamps
- Color Rendering Index: ≥80

Materials / Finish

- Body : Anodized aluminium
- Optics : PC

Installation / Mounting


- E27 base
- Integral gear unit allows quick and easy installation
- Vertical orientation only

Standards


- RoHS
- REACH
- IP 20

Ballast Compatibility List

- Metal Halide : M90, M57, M137 / M152, MH175, M138 / M153, MH250, M132 / M154, M131, M155 / M135, M59, MH400
- High Pressure Sodium : NG35, NG50, NG70, NG100, NG150, S66, S50, NG250, S51, NG400
- Mercury Vapor : H175

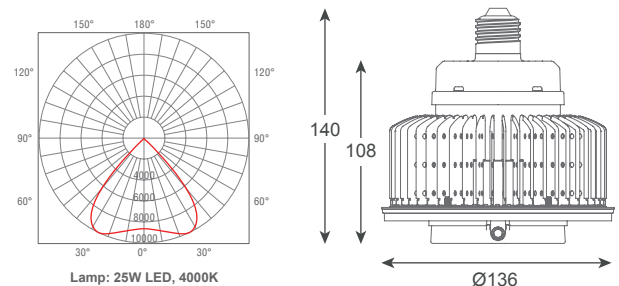

Universal Applications

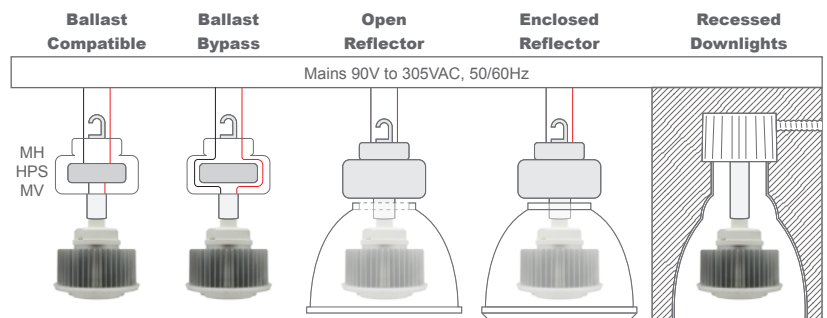

Model	Voltage	Wattage	Base	Color Temp	Beam Angle	Lumen
NB111-25W/835	90 - 305V	25W	E27	3500K	90°	3500lm
NB111-25W/840	90 - 305V	25W	E27	4000K	90°	3800lm
NB111-25W/850	90 - 305V	25W	E27	5000K	90°	3800lm

Notice : We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.