

LED Downlight ND281E - ND283E

Features

- 15W LED Downlight
- Recessed round, uniform distribution
- Twist-lock changeable LED module for inventory cost saving
- Ideal replacement up to 100W halogen downlight
- Adjustable tilting angle of $\pm 30^\circ$ vertically
- Good color rendition, $R_a \geq 80 / 90$

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium
- Reflector: High purity, anodized aluminium



Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out dimensions $\varnothing 75\text{mm} / \varnothing 95\text{mm}$

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

Dimming Options

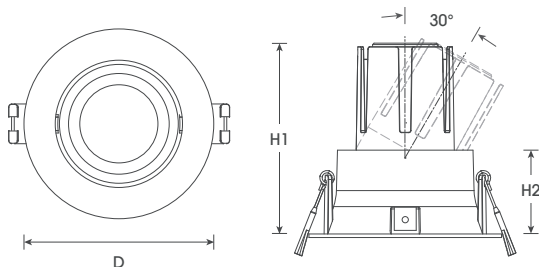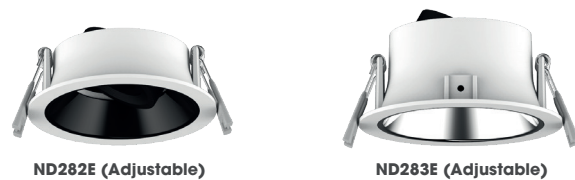

(Unit : mm)	(D)	(H1)	(H2)	Cut Out Dimensions
ND281E	Ø85	x 77	x 17	Ø75
ND282E	Ø104	x 95	x 35	Ø95
ND283E	Ø108	x 109	x 49	Ø95



Model	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	ENERGY STAR
ND281E-15W/830	15W	C.C. 350mA	3000K	20° / 30° / 38° / 50°	1180lm	F
ND281E-15W/840	15W	C.C. 350mA	4000K	20° / 30° / 38° / 50°	1230lm	F
ND281E-15W/865	15W	C.C. 350mA	6500K	20° / 30° / 38° / 50°	1280lm	F
ND282E-15W/830	15W	C.C. 350mA	3000K	20° / 30° / 38° / 50°	1180lm	F
ND282E-15W/840	15W	C.C. 350mA	4000K	20° / 30° / 38° / 50°	1230lm	F
ND282E-15W/865	15W	C.C. 350mA	6500K	20° / 30° / 38° / 50°	1280lm	F
ND283E-15W/830	15W	C.C. 350mA	3000K	20° / 30° / 38° / 50°	1180lm	F
ND283E-15W/840	15W	C.C. 350mA	4000K	20° / 30° / 38° / 50°	1230lm	F
ND283E-15W/865	15W	C.C. 350mA	6500K	20° / 30° / 38° / 50°	1280lm	F