



LED Tracklight NK121E - NK123E

Features

- 10W / 20W / 30W LED Tracklight
- Precise beam control by aluminium reflector
- Adjustable head spot lighting
- Comfort glare-free light
- High color rendition, Ra ≥ 90

Materials / Finish

- Body: Die cast aluminium
- Reflector: Anodised faceted aluminium
- Diffuser: Toughened glass
- Choice of White and Black color



Installation / Mounting

- Suitable for 2-wire, 3-wire track, 4-wire three phase track
- Flexible and easy installation



Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 20

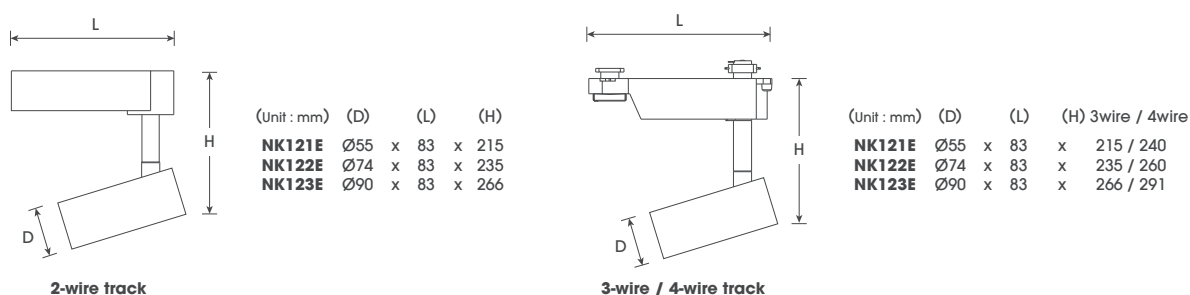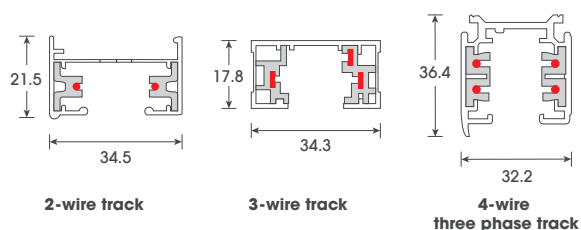

Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
NK121E-10W/930	220 - 240V	10W	3000K	12° / 24°	775lm	F
NK121E-10W/940	220 - 240V	10W	4000K	12° / 24°	825lm	F
NK121E-10W/965	220 - 240V	10W	6500K	12° / 24°	875lm	F
NK122E-20W/930	220 - 240V	20W	3000K	12° / 24°	1550lm	F
NK122E-20W/940	220 - 240V	20W	4000K	12° / 24°	1650lm	F
NK122E-20W/965	220 - 240V	20W	6500K	12° / 24°	1750lm	F
NK123E-30W/930	220 - 240V	30W	3000K	12° / 24° / 38° / 45°	2425lm	F
NK123E-30W/940	220 - 240V	30W	4000K	12° / 24° / 38° / 45°	2520lm	F
NK123E-30W/965	220 - 240V	30W	6500K	12° / 24° / 38° / 45°	2620lm	F

