

LED Spotlight NS161E - NS162E

Features

- 30W / 40W LED Spotlight
- Adjustable tilting angle of 0°-60° vertically and 350° horizontally
- Ideal replacement for HID lighting fixtures up to 70W
- Dimmable as option
- Good color rendition, Ra ≥80

Materials / Finish

- Body: Die cast aluminium
- Reflector: Anodised faceted aluminium
- Diffuser: Toughened glass


Installation / Mounting

- Quick recessed installation with two spring clips
- Suitable for ceiling thickness between 5 and 15mm
- Remote gear unit allows flexible and easy installation
- Cut out dimensions Ø142mm / Ø175mm

Standards


- Designed and manufactured to comply international standard EN60598
- Class II Electrical
- IP 20

Dimming Options

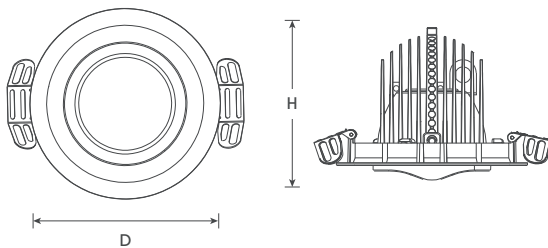

(Unit : mm)	(D)	(H)	Cut Out Dimensions
NS161E	Ø152 x	122	Ø142
NS162E	Ø186 x	151	Ø175

Model	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
NS161E-30W/830	30W	C.C. 700mA	3000K	24° / 40° / 60°	2520lm	F
NS161E-30W/840	30W	C.C. 700mA	4000K	24° / 40° / 60°	2620lm	F
NS161E-30W/865	30W	C.C. 700mA	6500K	24° / 40° / 60°	2715lm	F
NS162E-40W/830	40W	C.C. 900mA	3000K	24° / 40° / 60°	3400lm	F
NS162E-40W/840	40W	C.C. 900mA	4000K	24° / 40° / 60°	3500lm	F
NS162E-40W/865	40W	C.C. 900mA	6500K	24° / 40° / 60°	3600lm	F



EUROPE



INDOOR LUMINAIRE