



## LED Wallwasher WW1 - WW4

### Features

- 14W / 27W / 39W / 51W LED Linear Wallwasher
- 11 types advance optical solutions are available
- Individual SPD in series connection with L-L 10kV and L-Peak 20kV protection except 300mm length model with L-L 2kV
- Integral driver
- Optional glare shield
- Guarantees functionality in dusty and humid environment
- Good color rendition,  $R_a \geq 80$

### Materials / Finish

- Housing: Extruded aluminium, anodized in metallic grey
- End cap: Die cast aluminium, powder coated in grey
- Glass: Tempered glass


### Installation / Mounting

- Quick installation with  $\pm 90^\circ$  adjustable mounting bracket
- Integral gear unit allows quick and easy installation

### Standards

- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IP 66, IP 67

### Dimming Options

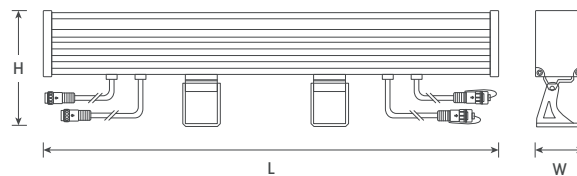

	(Unit : mm)	(L)	(W)	(H)	Max no. of fixture on 10A circuit breaker
WW1E	300 x 59 x 148				60
WW2E	600 x 59 x 148				40
WW3E	900 x 59 x 148				30
WW4E	1200 x 59 x 148				20

### Model Number Reference

WW1E-14W/830-0010-G

Model	Length	Driver	Wattage	CRI	Color Temp	Optics	Glare Shield
WW	1 = 300mm	E = Non DIM	14W = 14W	8	30 = 3000K	0010 = 10	G = Glare shield
	2 = 600mm	V = 1-10V DIM	27W = 27W		40 = 4000K	0015 = 15	X = No shield
	3 = 900mm		39W = 39W		65 = 6500K	0025 = 25	
	4 = 1200mm		51W = 51W			0030 = 30	
						0040 = 40	
						0060 = 60	
						1030 = 10 x 30	
						1045 = 10 x 45	
						1065 = 10 x 65	
						1070 = 10 x 70	
						2065 = 20 x 65	

Model	Voltage	Luminaire Wattage	Color Temp	Luminaire Lumen	ENERGY STAR
WW1E-14W/830-XXXX-G	100 - 240V	14W	3000K	1155lm	F
WW1E-14W/840-XXXX-G	100 - 240V	14W	4000K	1220lm	F
WW1E-14W/865-XXXX-G	100 - 240V	14W	6500K	1290lm	F
WW2E-27W/830-XXXX-G	100 - 240V	27W	3000K	2230lm	F
WW2E-27W/840-XXXX-G	100 - 240V	27W	4000K	2360lm	F
WW2E-27W/865-XXXX-G	100 - 240V	27W	6500K	2495lm	F
WW3E-39W/830-XXXX-G	100 - 240V	39W	3000K	3320lm	F
WW3E-39W/840-XXXX-G	100 - 240V	39W	4000K	3405lm	F
WW3E-39W/865-XXXX-G	100 - 240V	39W	6500K	3600lm	F
WW4E-51W/830-XXXX-G	100 - 240V	51W	3000K	4210lm	F
WW4E-51W/840-XXXX-G	100 - 240V	51W	4000K	4450lm	F
WW4E-51W/865-XXXX-G	100 - 240V	51W	6500K	4705lm	F

