

Halogen Bi-pin Lamp

JC 6V 5W G4 3200K


Features

- Application: Extra low voltage 6V AC/DC supply usage
- Lighting: High efficiency output 16lm/W, Excellent lumen maintenance



Diagrams

Dimensions:

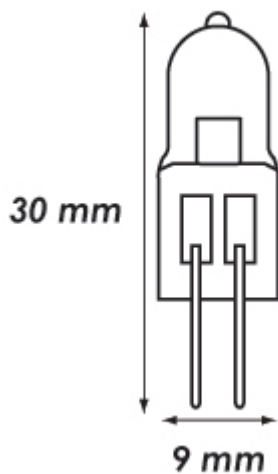

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Standards



Applications



Technical Data	
Electrical	
Rated Wattage [W]	5W±5%
Rated Voltage [V/Hz]	6V AC/DC, 50/60Hz
Power Factor	1
Input Current [A] @6V	0.83
Model	
JC 6V 5W G4	5W
Luminous Flux [lm]	
5W	78lm±10% @3200K
Performance	
Efficacy [lm/W]	16
Color Rendering Index [Ra]	100
Beam Angle [°]	360
Average Life, Ta@25°C [hrs]	100
Lumen Maintenance at 75hrs	>0.8
Number of Switching Cycles Before Failure	>400
Starting Time [S]	<0.2
Warm Up Time to 60% [S]	<1
Mechanical	
Diameter D [mm]	max. Φ9
Height H [mm]	max. 30
Base	G4
Material	Quartz Halogen
Packaging	100pcs in one crated box
	1000pcs per inner box
	5000pcs per carton
Standard Compliance	
CE-LVD	EN60432-3

Environment	RoHS
Mercury Content [mg]	0.0
Energy Class	B
Other	
Dimmable [Y/N]	Y
Operation Temperature	-20°C ~ 50°C
Storage Temperature	-10°C ~ 30°C