


LED T5 HE ECG

Features


- Energy saving with low power consumption
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Full glass body
- Good color rendition, Ra ≥ 80



- No Re-wiring*
- Broad compatibility with ballasts

EUROPE

TUBE

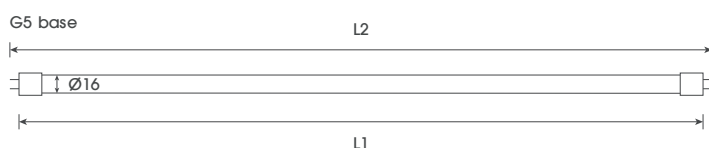


Model	Wattage	Color Temp	Beam Angle	Type	Length L1 / L2	Efficacy	Lumen	ENERGY*
LED F8T5/E/830/600	8W	3000K	270°	14W HE ECG	549mm / 563mm	115lm/W	920lm	F
LED F8T5/E/840/600	8W	4000K	270°	14W HE ECG	549mm / 563mm	118lm/W	940lm	F
LED F8T5/E/865/600	8W	6500K	270°	14W HE ECG	549mm / 563mm	120lm/W	960lm	E
LED F12T5/E/830/900	12W	3000K	270°	21W HE ECG	849mm / 863mm	115lm/W	1380lm	F
LED F12T5/E/840/900	12W	4000K	270°	21W HE ECG	849mm / 863mm	118lm/W	1410lm	F
LED F12T5/E/865/900	12W	6500K	270°	21W HE ECG	849mm / 863mm	120lm/W	1440lm	E
LED F16T5/E/830/1200	16W	3000K	270°	28W HE ECG	1149mm / 1163mm	115lm/W	1840lm	F
LED F16T5/E/840/1200	16W	4000K	270°	28W HE ECG	1149mm / 1163mm	118lm/W	1880lm	F
LED F16T5/E/865/1200	16W	6500K	270°	28W HE ECG	1149mm / 1163mm	120lm/W	1920lm	E
LED F20T5/E/830/1500	20W	3000K	270°	35W HE ECG	1449mm / 1463mm	115lm/W	2300lm	F
LED F20T5/E/840/1500	20W	4000K	270°	35W HE ECG	1449mm / 1463mm	118lm/W	2350lm	F
LED F20T5/E/865/1500	20W	6500K	270°	35W HE ECG	1449mm / 1463mm	120lm/W	2400lm	E

Actual performance may vary depending on ballast output

LED	HE
8W	~ 14W
12W	~ 21W
16W	~ 28W
20W	~ 35W

Direct retrofit in T5 HE ECG circuit*



- Suitable for direct retrofit to 1x, 2x HE electronic ballast
- Compatible with T5 Fluorescent Emergency Kit
- Compatibility with 3x, 4x T5 fluo. HE electronic ballast depending on brand / model

* Comply to EN62776