


Compact Fluorescent Lamps 2D shape

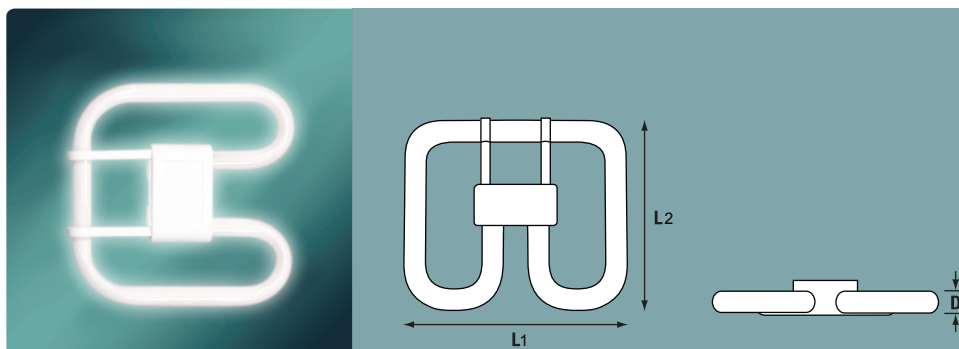

- Coated with high efficiency tri-phosphors with high CRI
- Tri-Phosphor colour :

| | | | |
|---------|---|--------------------|------------|
| 827 | = | Incand. Warm White | 2700K |
| 835 | = | White | 3500K |
| 840 | = | Cool White | 4200K |
| 860/865 | = | Daylight | 6000/6500K |

| Lamp Code | Wattage (W) | Colour Appearance | CRI (Ra) | Lumen (lm) | Length L ₁ (mm) | Length L ₂ (mm) | Tube Diameter D (mm) |
|---|-------------|--------------------|-----------|------------|----------------------------|----------------------------|----------------------|
| GR10q-4 (4-pin base) For ECG operation, with external starter if use with CCG | | | | | | | |
| F10/2D/827/4P | 10 | Incand. Warm White | 80-89, 1B | 650 | 92 | 95 | 14 |
| F10/2D/835/4P | 10 | White | 80-89, 1B | 650 | 92 | 95 | 14 |
| F10/2D/840/4P | 10 | Cool White | 80-89, 1B | 650 | 92 | 95 | 14 |
| F16/2D/827/4P | 16 | Incand. Warm White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F16/2D/835/4P | 16 | White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F16/2D/840/4P | 16 | Cool White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F21/2D/827/4P | 21 | Incand. Warm White | 80-89, 1B | 1350 | 138 | 141 | 15 |
| F21/2D/835/4P | 21 | White | 80-89, 1B | 1350 | 138 | 141 | 15 |
| F21/2D/840/4P | 21 | Cool White | 80-89, 1B | 1350 | 138 | 141 | 15 |
| F28/2D/827/4P | 28 | Incand. Warm White | 80-89, 1B | 2050 | 205 | 207 | 19 |
| F28/2D/835/4P | 28 | White | 80-89, 1B | 2050 | 205 | 207 | 19 |
| F28/2D/840/4P | 28 | Cool White | 80-89, 1B | 2050 | 205 | 207 | 19 |
| F38/2D/827/4P | 38 | Incand. Warm White | 80-89, 1B | 2850 | 205 | 207 | 19 |
| F38/2D/835/4P | 38 | White | 80-89, 1B | 2850 | 205 | 207 | 19 |
| F38/2D/840/4P | 38 | Cool White | 80-89, 1B | 2850 | 205 | 207 | 19 |
| GRY10q-3 (4-pin base) For ECG operation, with external starter if use with CCG | | | | | | | |
| F55/2D/827/4P | 55 | Incand. Warm White | 80-89, 1B | 4000 | 205 | 207 | 19 |
| F55/2D/835/4P | 55 | White | 80-89, 1B | 4000 | 205 | 207 | 19 |
| F55/2D/840/4P | 55 | Cool White | 80-89, 1B | 4000 | 205 | 207 | 19 |
| GR8q-2 (2-pin base), with integral starter for CCG | | | | | | | |
| F16/2D/827/2P | 16 | Incand. Warm White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F16/2D/835/2P | 16 | White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F16/2D/840/2P | 16 | Cool White | 80-89, 1B | 1050 | 138 | 141 | 15 |
| F28/2D/827/2P | 28 | Incand. Warm White | 80-89, 1B | 2050 | 205 | 207 | 19 |
| F28/2D/835/2P | 28 | White | 80-89, 1B | 2050 | 205 | 207 | 19 |
| F28/2D/840/2P | 28 | Cool White | 80-89, 1B | 2050 | 205 | 207 | 19 |