


Special 'O' Rated Metal Halide Lamps – European System

MHP Series – With Shrouded Arc-tube For Open Fixtures




- High Luminous efficacy with very good colour rendition
- Universal burning position
- Long burning hours
- 'O' rated lamps permit greater flexibility in fixture design, reduce fixture operating temperatures and lower fixture costs

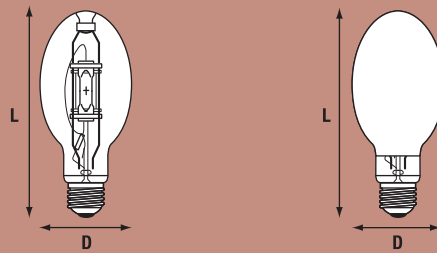

Shrouded arc-tube

The shroud helps contain hot particles in the lamp in case the arc-tube fails, hence there is no need to enclose the lamp



Quartz Arc-tube Technology

Lamp Code	Description	Wattage (W)	Lumen (lm)	Base	Diameter D (mm)	Length L (mm)
MHP-E70/WDL/CL	MHP70W/ED54/clear/E27/3K	70	5200	E27	55	137±3
MHP-E70/WDL	MHP70W/ED54/coated/E27/3K	70	4800	E27	55	137±3
MHP-E70/NDL/CL	MHP70W/ED54/clear/E27/4K	70	5500	E27	55	137±3
MHP-E70/NDL	MHP70W/ED54/coated/E27/4K	70	5100	E27	55	137±3
MHP-E100/WDL/CL	MHP100W/ED54/clear/E27/3K	100	8400	E27	55	137±3
MHP-E100/WDL	MHP100W/ED54/coated/E27/3K	100	7800	E27	55	137±3
MHP-E100/NDL/CL	MHP100W/ED54/clear/E27/4K	100	8400	E27	55	137±3
MHP-E100/NDL	MHP100W/ED54/coated/E27/4K	100	7800	E27	55	137±3
MHP-E150/WDL/CL	MHP150W/ED54/clear/E27/3K	150	12500	E27	55	137±3
MHP-E150/WDL	MHP150W/ED54/coated/E27/3K	150	11800	E27	55	137±3
MHP-E150/NDL/CL	MHP150W/ED54/clear/E27/4K	150	12500	E27	55	137±3
MHP-E150/NDL	MHP150W/ED54/coated/E27/4K	150	11800	E27	55	137±3
MHP-E250/NDL	MHP250W/ED90/coated/E40/4K	250	20000	E40	90	203±3
MHP-E250/D	MHP250W/ED90/coated/E40/6K	250	19000	E40	90	203±3
MHP-E400/NDL	MHP400W/ED118/coated/E40/4K	400	34000	E40	120	275±3
MHP-E400/D	MHP400W/ED118/coated/E40/6K	400	30000	E40	120	275±3