

## LED Downlight ND211E - ND217E



### Features

- 3W / 6W / 9W / 12W / 15W / 18W / 24W LED Downlight
- Recessed square, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Good color rendition, Ra  $\geq 80$

### Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PS, UV protected

### Installation / Mounting


- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions 75x75mm / 110x110mm / 135x135mm / 160x160mm / 190x190mm / 215x215mm / 285x285mm

### Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20



EU - INDOOR LUMINAIRE

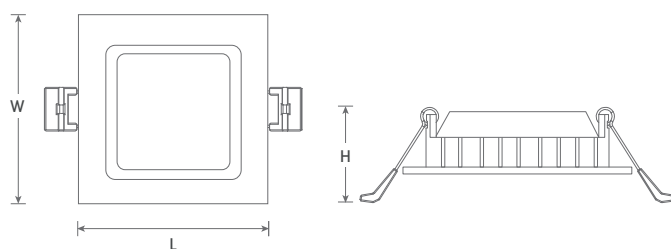

(Unit : mm)	(L)	(W)	(H)	Cut Out Dimensions
ND211E	85 x	85 x	28	75 x 75
ND212E	120 x	120 x	28	110 x 110
ND213E	146 x	146 x	28	135 x 135
ND214E	172 x	172 x	28	160 x 160
ND215E	201 x	201 x	28	190 x 190
ND216E	225 x	225 x	28	215 x 215
ND217E	298 x	298 x	28	285 x 285

Model	Luminaire Wattage	Luminaire Lumen	LED Wattage	LED Lumen	Color Temp	Driver
ND211E-3W/830	3W	160lm	2.5W	230lm	3000K	Integral
ND211E-3W/840	3W	170lm	2.5W	245lm	4000K	Integral
ND211E-3W/865	3W	170lm	2.5W	245lm	6500K	Integral
ND212E-6W/830	6W	395lm	5.5W	565lm	3000K	Integral
ND212E-6W/840	6W	420lm	5.5W	600lm	4000K	Integral
ND212E-6W/865	6W	420lm	5.5W	600lm	6500K	Integral
ND213E-9W/830	9W	625lm	8W	890lm	3000K	Integral
ND213E-9W/840	9W	660lm	8W	940lm	4000K	Integral
ND213E-9W/865	9W	660lm	8W	940lm	6500K	Integral
ND214E-12W/830	12W	820lm	10.5W	1030lm	3000K	Integral
ND214E-12W/840	12W	860lm	10.5W	1080lm	4000K	Integral
ND214E-12W/865	12W	860lm	10.5W	1080lm	6500K	Integral
ND215E-15W/830	15W	1110lm	13W	1390lm	3000K	External
ND215E-15W/840	15W	1165lm	13W	1460lm	4000K	External
ND215E-15W/865	15W	1165lm	13W	1460lm	6500K	External
ND216E-18W/830	18W	1330lm	16W	1660lm	3000K	External
ND216E-18W/840	18W	1390lm	16W	1740lm	4000K	External
ND216E-18W/865	18W	1390lm	16W	1740lm	6500K	External
ND217E-24W/830	24W	1970lm	21W	2400lm	3000K	External
ND217E-24W/840	24W	2070lm	21W	2590lm	4000K	External
ND217E-24W/865	24W	2070lm	21W	2590lm	6500K	External