

LED Downlight ND221E - ND227E



Features

- 3W / 6W / 9W / 12W / 15W / 18W / 24W LED Downlight
- Recessed square, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Good color rendition, Ra ≥ 80

Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PS, UV protected


Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions Ø75mm / Ø110mm / Ø135mm / Ø160mm / Ø180mm / Ø210mm / Ø285mm



Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

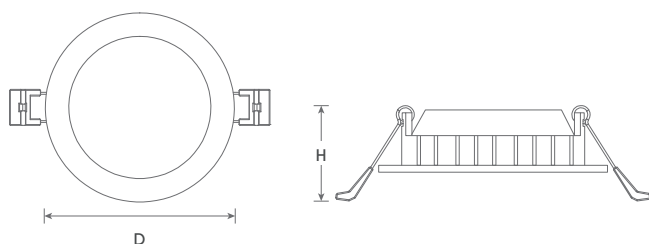

(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND221E	Ø85 x 30		Ø75
ND222E	Ø120 x 30		Ø110
ND223E	Ø146 x 30		Ø135
ND224E	Ø172 x 30		Ø160
ND225E	Ø192 x 30		Ø180
ND226E	Ø225 x 30		Ø210
ND227E	Ø295 x 30		Ø285

Model	Luminaire Wattage	Luminaire Lumen	LED Wattage	LED Lumen	Color Temp	Driver
ND221E-3W/830	3W	160lm	2.5W	230lm	3000K	Integral
ND221E-3W/840	3W	170lm	2.5W	245lm	4000K	Integral
ND221E-3W/865	3W	170lm	2.5W	245lm	6500K	Integral
ND222E-6W/830	6W	395lm	5.5W	565lm	3000K	Integral
ND222E-6W/840	6W	420lm	5.5W	600lm	4000K	Integral
ND222E-6W/865	6W	420lm	5.5W	600lm	6500K	Integral
ND223E-9W/830	9W	625lm	8W	890lm	3000K	Integral
ND223E-9W/840	9W	660lm	8W	940lm	4000K	Integral
ND223E-9W/865	9W	660lm	8W	940lm	6500K	Integral
ND224E-12W/830	12W	820lm	10.5W	1030lm	3000K	Integral
ND224E-12W/840	12W	860lm	10.5W	1080lm	4000K	Integral
ND224E-12W/865	12W	860lm	10.5W	1080lm	6500K	Integral
ND225E-15W/830	15W	1110lm	13W	1390lm	3000K	External
ND225E-15W/840	15W	1165lm	13W	1460lm	4000K	External
ND225E-15W/865	15W	1165lm	13W	1460lm	6500K	External
ND226E-18W/830	18W	1330lm	16W	1660lm	3000K	External
ND226E-18W/840	18W	1390lm	16W	1740lm	4000K	External
ND226E-18W/865	18W	1390lm	16W	1740lm	6500K	External
ND227E-24W/830	24W	1970lm	21W	2400lm	3000K	External
ND227E-24W/840	24W	2070lm	21W	2590lm	4000K	External
ND227E-24W/865	24W	2070lm	21W	2590lm	6500K	External